




**Ministry of Defence
Defence Standard 61-21**

Issue 1 Publication Date 22 August 2003

**General Specification
for
Batteries
Supplement 008
Lithium Iron Disulphide Battery
1.5V, NSN 6135-01-333-6101**

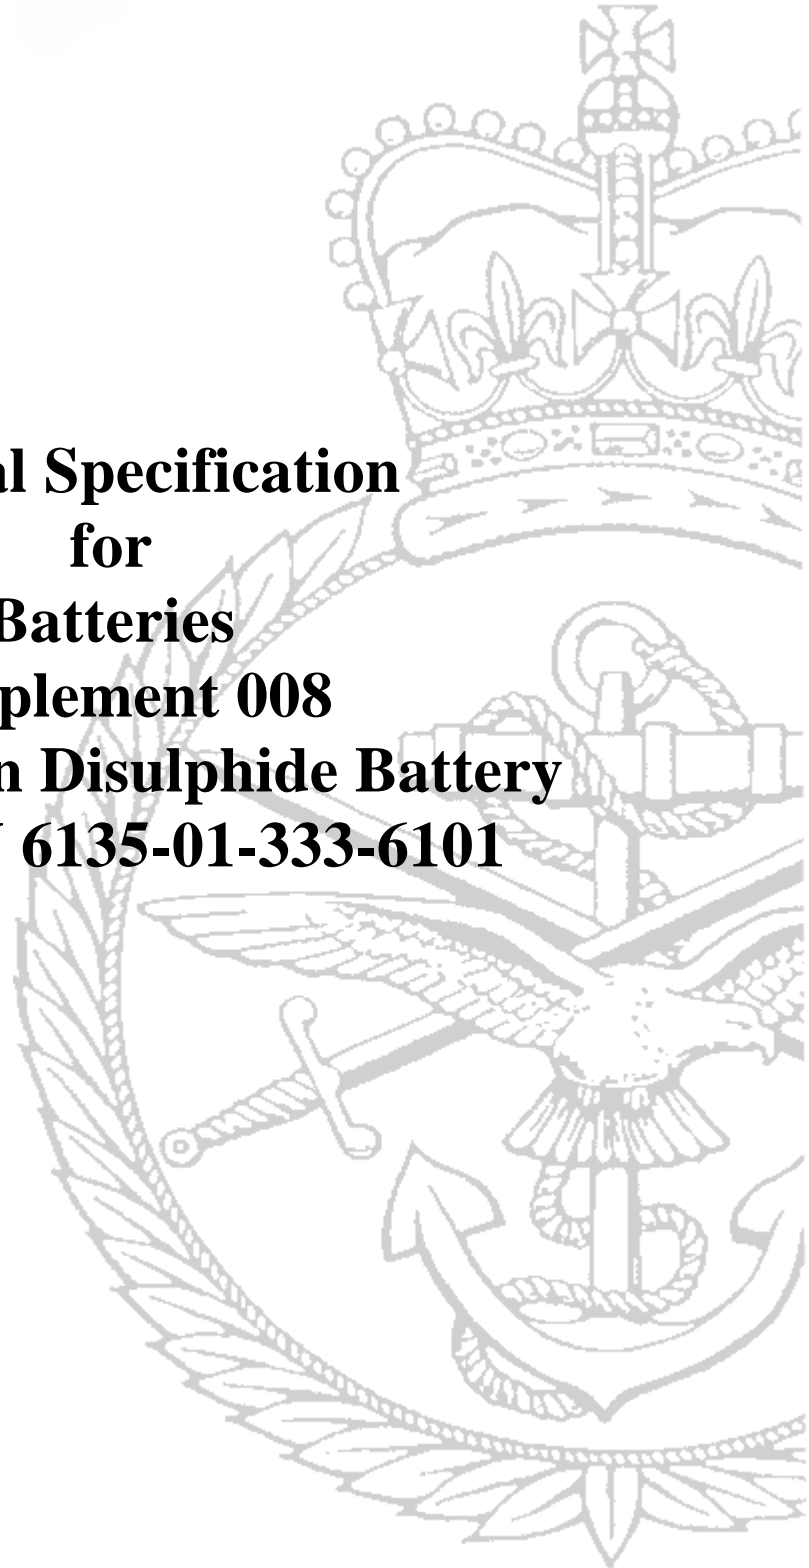

AMENDMENT RECORD

Amd No	Date	Text Affected	Signature and Date

REVISION NOTE

This supplement has been revised to align its content with the new Defence Standard for batteries, Def Stan 61-21.

HISTORICAL RECORD

This standard supersedes the following:

This supplement supersedes Def Stan 61-3 Supplement 100 Issue A Draft January 2000.

CONTENT

Description	Page
Content	1
Preface	3
Main Text	4
SECTION 1 GENERAL REQUIREMENTS	
0 Introduction	4
1 Scope	4
2 Warning	4
3 Related Documents	5
4 Definitions	5
5 Abbreviations	5
SECTION 2 ELECTRICAL CHARACTERISTICS	
6 Electrochemical System	6
7 Nominal and Off-load Voltage	6
8 On-load Voltage	6
SECTION 3 PHYSICAL CHARACTERISTICS	
9 Dimensions	7
10 Mass	7
11 Marking	7
SECTION 4 PERFORMANCE REQUIREMENTS	
12 Discharge Requirements	8
13 Storage Requirements	8
14 Environmental Requirements	9
SECTION 5 PRODUCT CONFORMITY CERTIFICATION	
15 General Requirements	10
16 Hazard Classification and Transportation Requirements	10

DEF STAN 61-21 SUPPLEMENT 008

CONTENT

Description	Page
SECTION 6 MARKING REQUIREMENTS	
16 General Requirements	11
SECTION 7 PACKAGING REQUIREMENTS	
17 General Requirements	12
Table 1 Discharge Duration Requirements	8
Table 2 Environmental Test Requirements	9

PREFACE

Standards for Defence

Specification for

Lithium Iron Disulphide Battery

1.5V, NSN 6135-01-333-6101

- a.** This supplement shall be read in conjunction with Def Stan 61-21.
- b.** This supplement provides a definitive specification for the electrical, physical, performance and nomenclature requirements for a 1.5V Lithium Iron Disulphide battery.
- c.** This supplement has been agreed by the authorities concerned with its use and is intended to be used whenever relevant in all future designs, contracts, orders etc. and whenever practicable by amendment to those already in existence. If any difficulty arises which prevents application of this Defence Standard and its associated supplements, the UK Defence Standardization (DStan) shall be informed so that a remedy may be sought.
- d.** Any enquiries regarding this standard in relation to an invitation to tender or a contract in which it is incorporated are to be addressed to the responsible technical or supervising authority named in the invitation to tender or contract.
- e.** Compliance with this Defence Standard shall not in itself relieve any person from any legal obligations imposed upon them.
- f.** This standard has been devised solely for the use of the Ministry of Defence (MOD) and its contractors in the execution of contracts for the MOD. To the extent permitted by law, the MOD hereby excludes all liability whatsoever and howsoever arising (including, but without limitation, liability resulting from negligence) for any loss or damage however caused when the standard is used for any other purpose.

TEXT

Standards for Defence

Specification for

Lithium Iron Disulphide Battery

1.5V, NSN 6135-01-333-6101

SECTION 1 GENERAL REQUIREMENTS

0 INTRODUCTION

It is Ministry of Defence (MOD) policy to purchase batteries against performance specifications whenever possible. Defence Standard 61-21 and its series of supplements has been generated to address the current requirements for batteries. This supplement is applicable when invoked directly by a MOD invitation to tender, contract, or when referred to by other MOD battery specifications.

1 SCOPE

This supplement provides a definitive specification for the electrical, physical, performance and nomenclature requirements for a 1.5V Lithium Iron Disulphide battery., NSN 6135-01-333-6101, BS EN 60086-1 designation FR6. This supplement does not invoke Product Conformity Certification.

2 WARNING

The Ministry of Defence (MOD), like its contractors, is subject to both United Kingdom and European laws regarding Health and Safety at Work, without exemption. All Defence Standards either directly or indirectly invoke the use of processes and procedures that could be injurious to health if adequate precautions are not taken. Defence Standards or their use in no way absolves users from complying with statutory and legal requirements relating to Health and Safety at Work.

SECTION 1 GENERAL REQUIREMENTS

3 RELATED DOCUMENTS

3.1 For the purposes of this supplement all related documents are listed in Defence Standard 61-21.

3.2 Reference in this standard to any related document means in any invitation to tender or contract the edition and all amendments current at the date of such tender or contract unless a specific edition is indicated.

3.3 In consideration of **3.2** above, users shall be fully aware of the issue and amendment status of all related documents, particularly when forming part of an invitation to tender or contract. Responsibility for the correct application of standards rests with users.

3.4 DStan can advise regarding where related documents are obtained from. Requests for such information can be made to the DStan Helpdesk. How to contact the helpdesk is shown on the outside rear cover of Def Stans.

4 DEFINITIONS

Def Stan 61-21 definitions shall apply.

5 ABBREVIATIONS

Def Stan 61-21 abbreviations shall apply.

DEF STAN 61-21 SUPPLEMENT 008

SECTION 2 ELECTRICAL CHARACTERISTICS

6 ELECTROCHEMICAL SYSTEM

The electrochemical system shall be defined by BS EN 60086-1: system designation F.

7 NOMINAL AND OFF-LOAD VOLTAGE

The nominal and off-load voltage shall be defined by BS EN 60086-1: system designation F.

8 ON-LOAD VOLTAGE

The on-load voltage shall exceed 1V during the application of a $1\Omega \pm 0.5\%$ load for 2 seconds.

SECTION 3 PHYSICAL CHARACTERISTICS

9 DIMENSIONS

The dimensions of the battery will be in accordance with BS EN 60086-2 designation FR6.

10 MASS

The mass of the battery shall not exceed 16g.

11 MARKING

Marking shall be in accordance with BS EN 60086-1 designation FR6.

SECTION 4 PERFORMANCE REQUIREMENTS

12 DISCHARGE REQUIREMENTS

When subjected to the following continuous discharge loads, the batteries shall meet the duration requirements (to an end-point of 0.9V) given in **Table 1**.

- a) 300mA ± 10mA
- b) 1A ± 10mA

Prior to undertaking a discharge test, the batteries shall be pre-conditioned at the test temperature for a minimum of 24 hours.

Table 1 Discharge Duration Requirements				
Pre-Discharge Test And Discharge Loads	Supplement Clause Reference	Minimum Discharge Duration (minutes)		
		Discharge Temperature		
		-25 ± 2°C	+20 ± 2°C	+55 ± 2°C
Immediate Discharge @ 300mA @ 1A	12	140	390	390
		20	100	100
52 Weeks Temperate Storage @ 300mA @ 1A	13.2	140	390	390
		20	100	100
260 Weeks Temperate Storage @ 300mA @ 1A	13.2	126	350	350
		18	90	90
Environmental Tests @ 300mA @ 1A	14	-	390	-
		-	100	-

13 STORAGE REQUIREMENTS

13.1 Examination During Storage

At the start, and on completion of each storage test, the off-load and on-load voltage tests (clauses 7 and 8) shall be carried out, and the batteries examined. Any battery showing signs of leakage, corrosion or distortion shall be deemed to have failed.

13.2 Temperate Storage

Batteries shall be stored in an ambient temperature of 20 ± 5°C and a relative humidity between 45% and 75% for the specified duration.

SECTION 4 PERFORMANCE REQUIREMENTS

14 ENVIRONMENTAL REQUIREMENTS

Batteries allocated to the environmental tests shall be subjected to the sequence shown in **Table 2**. During the mechanical tests, the batteries may be mounted by any suitable method. Unless otherwise specified, all tests shall be carried out at an ambient $20 \pm 2^\circ\text{C}$. At the start, and on completion of each test, the off-load and on-load voltage tests (**clauses 7 and 8**) shall be carried out, and the batteries examined. Any battery showing signs of leakage or distortion shall be deemed to have failed.

Table 2 Environmental Test Requirements			
Test	Title	Spec.	Additional Information
14.1	Shock	BS EN 60068-2-27	Peak acceleration: 100 g _n . Pulse shape: half-sine. Duration: 6 ms. Three shocks shall be applied in each direction of the longitudinal axis and in each direction of the transverse axis (i.e. a total of 12 shocks).
14.2	Vibration	BS EN 60068-2-6	Frequency range: 10 to 500 Hz. Amplitude: 0.75 mm or 10 g _n (whichever is the less severe). The test to be carried out shall be endurance by sweeping, and shall consist of 15 sweeps in the longitudinal axis and 15 sweeps in the transverse axis
14.3	Bump	BS EN 60068-2-29	Peak acceleration: 40 g _n . Duration: 6 ms. The total number of bumps shall be 4000 ± 8 , at a rate between 1 and 3 bumps per second, 1000 ± 2 in each direction of the longitudinal axis and in each direction of the transverse axis.
14.4	Free Fall	BS EN 60068-2-32	The battery may be dropped in any attitude so as not to fall on either of its terminals. One fall only shall be made. The height of the fall shall be 1 metre.
14.5	Rapid Temp. Change	BS EN 60068-2-1 (Cold)	A single cold - hot cycle is to be applied using two test chambers. The general requirements of test procedure Aa shall apply. The low temperature shall be $-40 \pm 2^\circ\text{C}$ and the high temperature shall be $70 \pm 2^\circ\text{C}$. The duration of exposure at each temperature shall be 3 hours. The duration of the changeover time shall be not less than 2 minutes or more than 3 minutes.
14.6	Dry Heat	BS EN 60068-2-2	The test severity shall be a temperature of $85 \pm 2^\circ\text{C}$ for a duration of 16 hours.

DEF STAN 61-21 SUPPLEMENT 008

SECTION 5 PRODUCT CONFORMITY CERTIFICATION

15 GENERAL REQUIREMENTS

The Product Conformity Certification requirements defined in **Section 2** of **Def Stan 61-21** are not applicable to this supplement. However, the batteries shall meet the hazard classification and transportation requirements of **clause 16**.

16 HAZARD CLASSIFICATION AND TRANSPORTATION REQUIREMENTS

For transportation considerations, lithium cells and batteries are designated as UN 3090 and may be either classified as Class 9 Dangerous Goods or are exempt, in either case compliance with various constructional and safety test requirements are mandatory within a range of transport regulations.

Within the Declaration of Conformity, the manufacturer shall state:

1. The UN hazard Classification (ie either Class 9 Dangerous Goods or Exempt from Class 9)
2. Compliance with the range of UK National and Multi-National mode specific transport regulations stipulated in **Def Stan 61-21**.
3. The maximum lithium content of an individual cell (expressed in grams).
4. Reference to a test report demonstrating compliance to UK National and Multi-National mode specific transport regulations stipulated in **Def Stan 61-21**. The report shall also indicate the date of assessment.
5. Reference to the manufacturing data package (build standard) for materials, piece parts and processes used in the battery construction.
6. A statement on the hermeticity of the cell and indication of any safety devices (such as vents, fuses, diodes and positive temperature coefficient resistors etc) built into the product.

SECTION 6 MARKING REQUIREMENTS

17 GENERAL REQUIREMENTS

Commercial product markings are acceptable provided they are in accordance with **clause 11.**

SECTION 7 PACKAGING AND LABELLING REQUIREMENTS

18 GENERAL REQUIREMENTS

In addition to the packaging and labelling requirements stated in the contract, all packaging and labelling shall comply with the requirements of the civil dangerous goods transport regulations governing land, sea and air modes of transport. Except where specified in the contract or excluded within the regulations this shall include packaging requirements for mixed passenger and cargo aircraft.

Outer levels of packaging shall also include:

1. The product NATO Stock Number.
2. The date of manufacture.
3. The battery shelf life in the format “NOT TO BE STORED BEYOND *MM,YY*” which shall be 5 years from the date of manufacture.

Inside Rear Cover

© Crown Copyright 2003
Copying Only as Agreed with DStan

Defence Standards are Published by and Obtainable from:

Defence Procurement Agency
An Executive Agency of The Ministry of Defence
UK Defence Standardization
Kentigern House
65 Brown Street
GLASGOW G2 8EX

DStan Helpdesk

Tel 0141 224 2531/2
Fax 0141 224 2503
Internet e-mail enquiries@dstan.mod.uk

File Reference

The DStan file reference relating to work on this standard is D/DStan/61/21/8.

Contract Requirements

When Defence Standards are incorporated into contracts users are responsible for their correct application and for complying with contractual and statutory requirements. Compliance with a Defence Standard does not in itself confer immunity from legal obligations.

Revision of Defence Standards

Defence Standards are revised as necessary by up issue or amendment. It is important that users of Defence Standards should ascertain that they are in possession of the latest issue or amendment. Information on all Defence Standards is contained in Def Stan 00-00 Standards for Defence Part 3 , Index of Standards for Defence Procurement Section 4 'Index of Defence Standards and Defence Specifications' published annually and supplemented regularly by Standards in Defence News (SID News). Any person who, when making use of a Defence Standard encounters an inaccuracy or ambiguity is requested to notify the Directorate of Standardization (DStan) without delay in order that the matter may be investigated and appropriate action taken.